



FSI B21

PATENTED HILL-HOLD BRAKE SYSTEM AND 14 HP ENGINE WITH RECOIL STARTER




SCAN FOR VIDEO
AND MORE INFO



NO DAILY MAINTENANCE

The closed bearing for the cutter wheel is pre-greased from factory for more than 1000 hours of normal operation, eliminating the risk of under- or overgreasing and make daily maintenance a thing of the past.

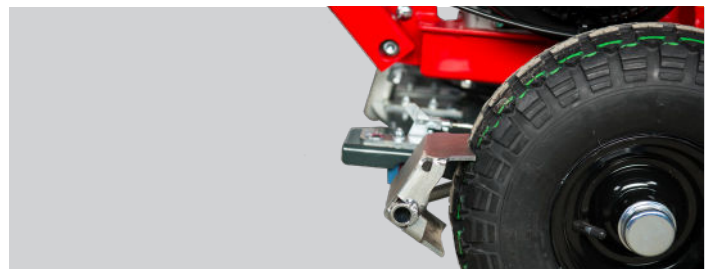

HILL-HOLD SYSTEM

This patented brake system blocks any forward motion of the wheels, allowing the operator to pull the stump cutter backwards on ramps, up steps, or in uneven terrain with little effort and increased safety.




OPERATOR-FRIENDLY

The vibration-damped and height-adjustable handle combined with the pivot-point design make it less strenuous for the operator to sweep the cutter arm from side to side.



SIMPLE TENSIONING

The single-sided mounting of the cutting disc makes tensioning the banded V-belt simple, as no parallelism is to be maintained.

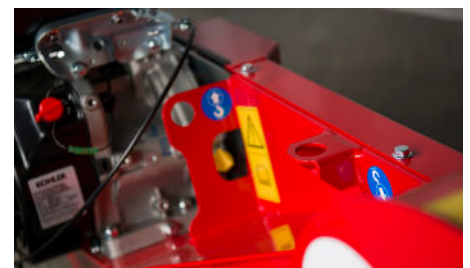

SAFE TRANSPORT

With multiple, easy-accessible lashing and lifting points you can quickly fasten this stump cutter for transport and arrive safely to the next jobsite.



TECHNICAL DATA

ENGINE

Engine	Kohler CH440	Honda GX390
Engine size	10.5 kW / 14 hp	8.2 kW/ 11.1 hp
Cooling	Air	
Fuel	Petrol	
Tank capacity	7 l	6.1 l

DRIVE SYSTEM

Ground drive	Manual
Wheels	Ø360 x 100 - 4 ply
Brake	Hill-hold system - 2 x individual

DIMENSIONS

Length	1580 mm	
Width	680 mm	
Height	1230 mm	
Weight	130 kg	135 kg

CUTTING HEAD

Diameter	386 mm
Teeth/Quantity	FSI 21 - 8 pcs
Clutch	Centrifugal
Cutter wheel drive	V-belt
Sweep	Manual

WORK AREA

Above ground level	30 cm
Below ground level	25 cm
Sweep width	90 cm
Max cutting depth	2.4 cm per sweep

OPERATION

Control panel	In the handle
---------------	---------------

OPTIONAL

Document tube
Special color - (RAL color)
Hour meter

FEATURES

- Individual brakes with patented hill-hold system
- FSI power-cut cutter wheel
- Large and easy-to-operate wheels
- Safety bar - disengaging the cutter wheel upon release
- Original FSI teeth
- Tool set

FSI Stump Cutters reserves the right to make changes in engineering, design, and specifications without notice. Dimensions may vary, depending on options and selections.

Vers: 11-2023